

I/O PIN ASSIGNMENTS

AC INPUT (J1): DEMC 9PJ K87

J1 - 1	115VAC - ØA
J1 - 2	115VAC - ØB
J1 - 3	115VAC - ØC
J1 - 4	n/c
J1 - 5	GROUND (Chassis)
J1 - 6	115VAC - ØA
J1 - 7	115VAC - ØB
J1 - 8	115VAC - ØC
J1 - 9	GROUND (Chassis)

DC OUT (J2) : DDM 24W7S

J2 - A1	+5.0VDC
J2 - A2	+5.0VDC
J2 - A3	+5.0VDC Rtn
J2 - A4	+5.0VDC Rtn
J2 - A5	n/c
J2 - A6	n/c
J2 - A7	(spare)
J2 - 1	AC OK LED
J2 - 2	Logic Ground
J2 - 3	n/c
J2 - 4	n/c
J2 - 5	n/c
J2 - 6	OT LED
J2 - 7	DC OK*
J2 - 8	DC OK LED
J2 - 9	n/c
J2 - 10	Overtemp-2
J2 - 11	Overtemp-1
J2 - 12	Overtemp-1 Rtn
J2 - 13	+ 3.3VDC sense HI
J2 - 14	+ 3.3VDC sense LO
J2 - 15	+ 5.0VDC sense HI
J2 - 16	+ 5.0VDC sense LO
J2 - 17	Overtemp-2 Rtn


DC OUT (J3): DCM 8W8S

J3 - A1	+ 3.3VDC
J3 - A2	+ 3.3VDC Rtn
J3 - A3	+ 3.3VDC
J3 - A4	+ 3.3VDC Rtn
J3 - A5	+ 3.3VDC
J3 - A6	+ 3.3VDC Rtn
J3 - A7	+ 3.3VDC
J3 - A8	+ 3.3VDC Rtn

NOTE: WEIGHT 12 lbs. (5.5 kgs.)

This Drawing contains trade secrets and/or confidential information ("Proprietary Information") of Viable Power Conversion Technologies ("VPCT") which, if disclosed, could cause financial loss to, or prejudice the competitive position of, VPCT. The Proprietary Information shall not be used for any purpose other than the evaluation of this proposal. Disclosure of or access to such Proprietary Information may not be made or given to third parties without VPCT's prior written consent.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED

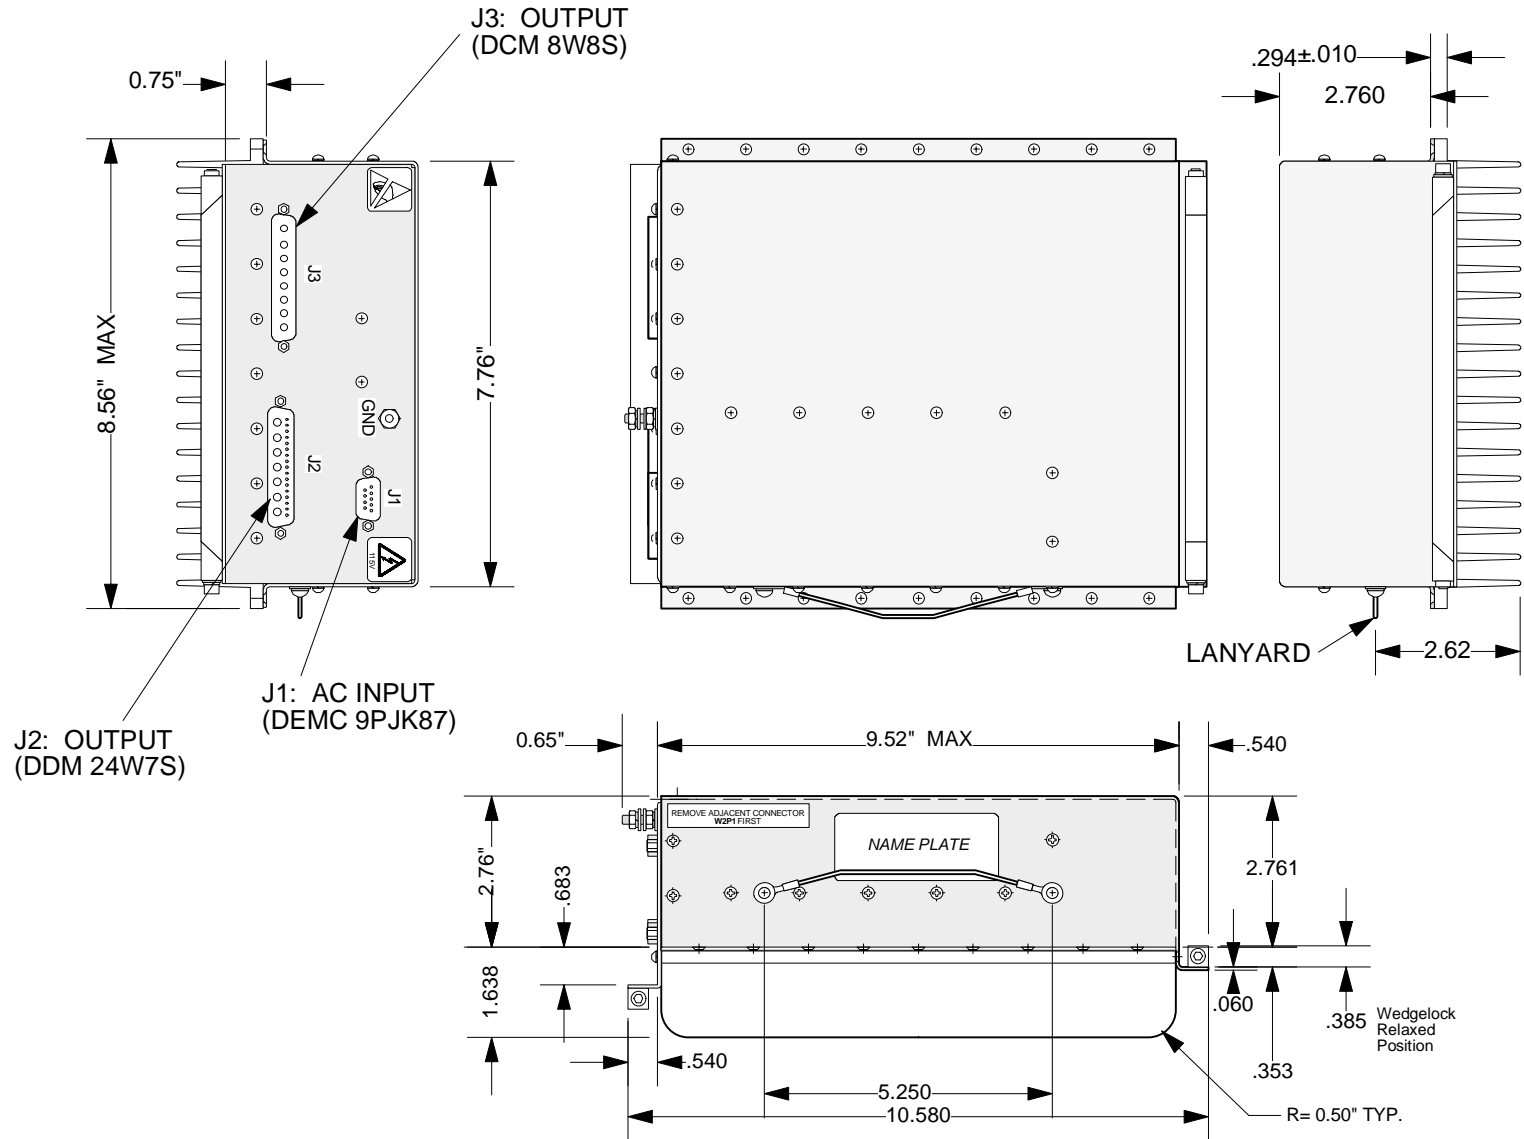

UNLESS OTHERWISE SPECIFIED	
DIMENSIONS IN INCHES.	
TOLERANCES ON:	
Hole Diam ± .003	Angles ± 2°
Decimals .XXX ± .005	
.XX ± .02	

<i>Viable Power Conversion Technologies Inc.</i>					
DRAWN: M. Zadah	DWG. NAME:		115V L-L 400Hz 3ø 215W AC-to-DC PSU (LAN-Switch) +3.3V/ 50A, +5V/ 10A		
DATE: 12 MAY 2003	CAGE: 3AJ03				
CHKD:	DWG. No.:				
DATE:	VOI 99005-01				
APPVD:	SCALE: 1:3.5	REV.:	SHEET: 1 of 1		
DATE:	A	-			