

I/O PIN ASSIGNMENTS

J1: MS 27508 E14B5 P


J1 - A 115VAC, phase A
 J1 - B 115VAC, phase B
 J1 - C 115VAC, phase C
 J1 - D Chassis Gnd.
 J1 - E Chassis Gnd.

J2: MS 27508 E16B6 S

J2 - A +28VDC
 J2 - B +28VDC
 J2 - C +28VDC Rtn.
 J2 - D +28VDC Rtn.
 J2 - E +28VDC
 J2 - F +28VDC Rtn.

J3: MS 27508 E16B26 S

J3 - A + 5VDC
 J3 - B + 5VDC
 J3 - T + 5VDC Rtn.
 J3 - U + 5VDC Rtn.
 J3 - C +15VDC
 J3 - D +15VDC Rtn.
 J3 - E - 15VDC
 J3 - V - 15VDC Rtn.
 J3 - F +20VDC
 J3 - W +20VDC Rtn.
 J3 - G - 20VDC
 J3 - H - 20VDC Rtn.
 J3 - J +28VDC #2
 J3 - K +28VDC #2
 J3 - X +28VDC #2 Rtn.
 J3 - Y +28VDC #2 Rtn.
 J3 - b +5VDC (+) Sense
 J3 - c +5VDC (-) Sense
 J3 - L - 5.2VDC
 J3 - M - 5.2VDC Rtn.
 J3 - N (spare)
 J3 - P (spare)
 J3 - R 28V #1, BIT fault
 J3 - S (not connected)
 J3 - Z (spare)
 J3 - a Chassis Gnd.

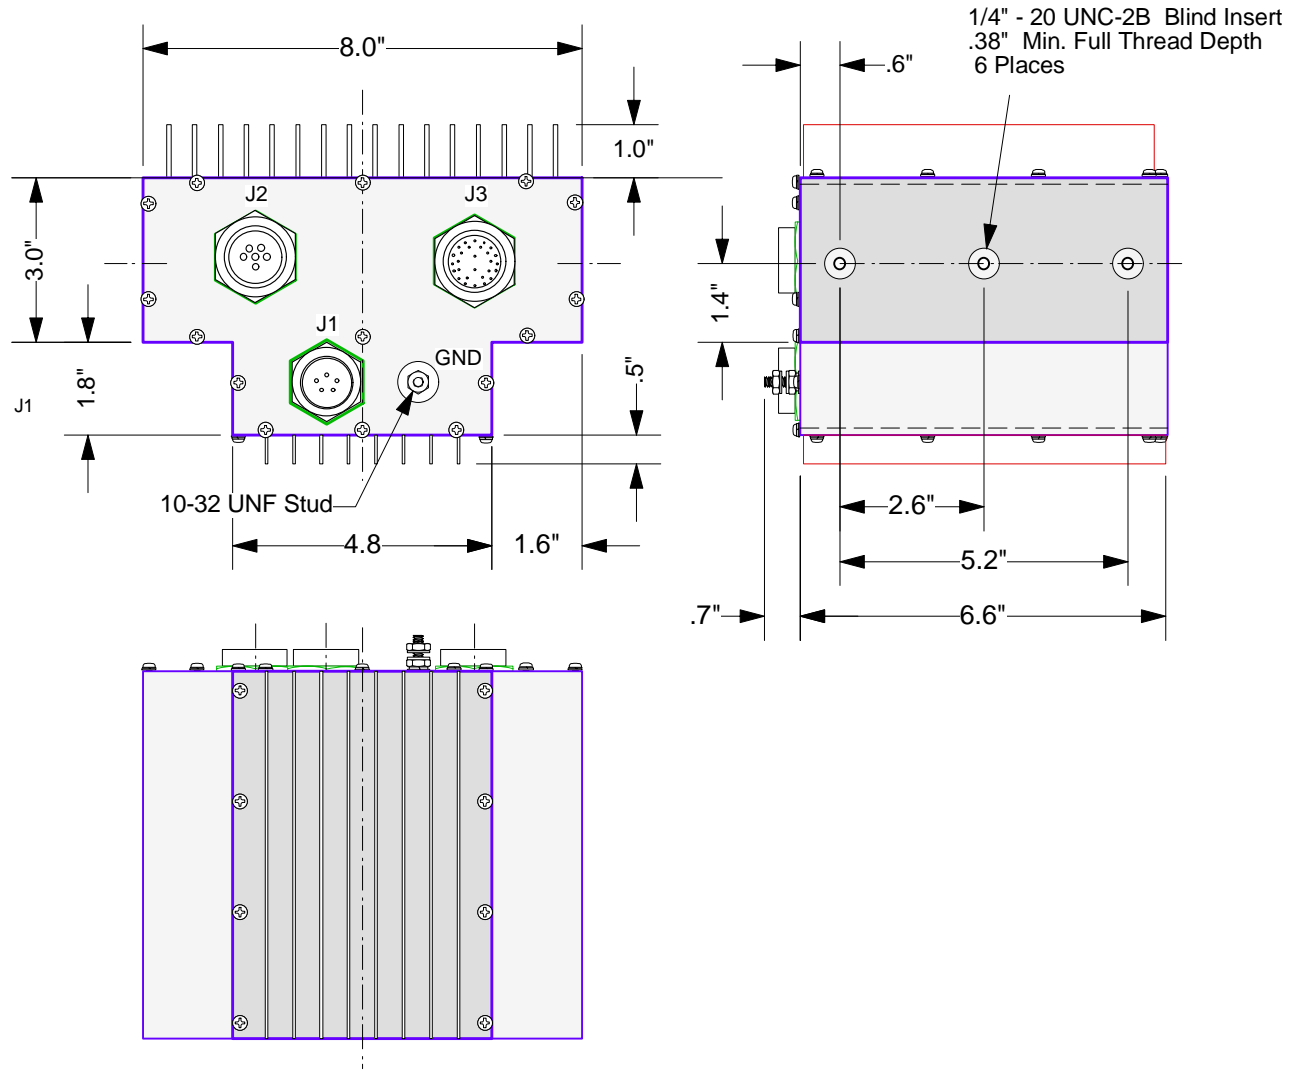

WEIGHT: 9 lbs. (4.1 kgs.)

<i>Viabie Power Conversion Technologies Inc.</i>		3AJ03
DRAWN:	M. ZADAH	115V L-N 400Hz 3Ø 500W AC -DC PSU +28v, +28v, ±20v, ±15v, +5v, - 5.2v
DATE:	2 AUG. 2002	
CHKD:		Dwg No:VOI 96004-00
DATE:		
APPVD:		Rev. -
DATE:		
Scale 1:3.5	Sheet 1 of 1	size A