

I/O PIN ASSIGNMENTS

AC INPUT POWER


(J1): DEMC 9PJ K87

J1 - 1	115VAC - LINE
J1 - 2	N/A
J1 - 3	GROUND CHASSIS
J1 - 4	N/A
J1 - 5	NEUTRAL
J1 - 6	115VAC - LINE
J1 - 7	GROUND CHASSIS
J1 - 8	GROUND CHASSIS
J1 - 9	NEUTRAL

DC OUT (J2): HYPERTRONICS

LTEBV14/3MFS/2CFS/1DFS/TH

A1	+5.06 VDC	(Type M)
A2	+5.06 VDC	
B1	+5.06 VDC Rtn.	(Type M)
B2	+5.06 VDC Rtn.	
C1	+3.30 VDC	(Type M)
C2	+3.30 VDC Rtn.	
D1	+12.10 VDC	(Type C)
D2	+12.10 VDC Rtn.	
E1	-12.10 VDC Rtn.	(Type C)
E2	-12.10 VDC	
F1	5.06 VDC Sense	(Type D)
F2	5.06 VDC Rtn. Sense	
F3	3.30 VDC Sense	
F4	3.30 VDC Rtn. Sense	
F5	+12.10 VDC Sense	
F6	+12.10 VDC Rtn. Sense	
F7	-12.10 VDC RTN. Sense	
F8	-12.10 VDC Sense	
F9	AC FAIL*	
F10	AC FAIL* RTN.	
F11	SYS RESET*	
F12	SYS RESET* RTN.	
F13	LINK	
F14	Latched Signal Input.	
F15	N/A	
F16	N/A	
F17	N/A	

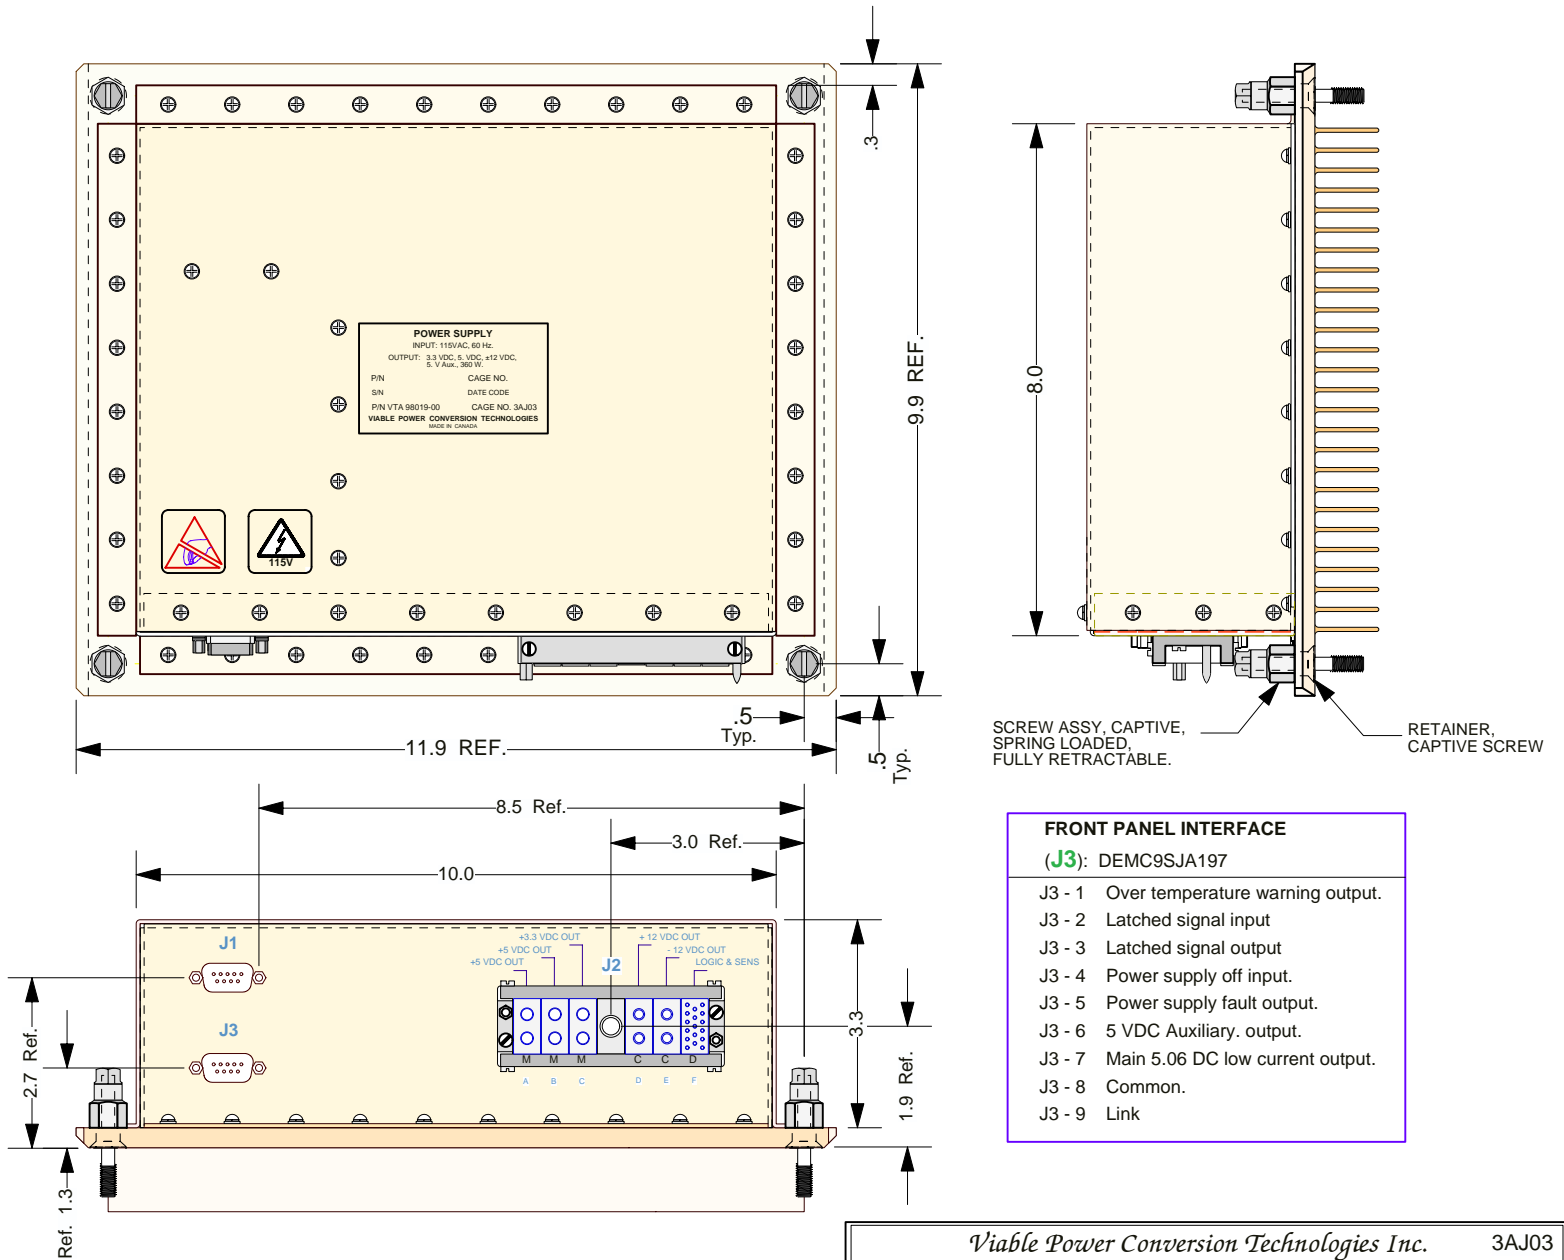

FRONT PANEL INTERFACE
(J3): DEMC9SJA197

J3 - 1	Over temperature warning output.
J3 - 2	Latched signal input
J3 - 3	Latched signal output
J3 - 4	Power supply off input.
J3 - 5	Power supply fault output.
J3 - 6	5 VDC Auxiliary. output.
J3 - 7	Main 5.06 DC low current output.
J3 - 8	Common.
J3 - 9	Link

<i>Viable Power Conversion Technologies Inc.</i>		3AJ03
DRAWN:	M. ZADAH	MULTI-CHANNEL 360W PSU
DATE:	11 OCT. 2001	
CHKD:		
DATE:		
APPVD:		Size A
DATE:		
Scale 1 : 3	Sheet 1 of 1	Dwg. No.: VOI 98019-00
		Rev. D

This Drawing contains trade secrets and/or confidential information ("Proprietary Information") of Viable Power Conversion Technologies ("VPCT") which, if disclosed, could cause financial loss to, or prejudice the competitive position of, VPCT. The Proprietary Information shall not be used for any purpose other than the evaluation of this proposal. Disclosure of or access to such Proprietary Information may not be made or given to third parties without VPCT's prior written consent.